

AUTOLIFT - RISE-P

Recommended for up to 15 vehicles



Technical data sheet



- ✓ TÜV certified
- ✓ CE certified
- ✓ With driver onboard
- ✓ GSM
- ✓ Low noise
- ✓ Space saving
- ✓ Emergency battery
- ✓ Manual emergency lowering
- ✓ Positioning aid
- ✓ Drive-through sensors

RISE-P



Car lift

Specification

- Stroke = up to 3700 mm
- Platform length = up to 5950 mm
- Platform width = up to 2900 mm
- Standard lifting capacity = up to 2500 kg
- Optional lifting capacity = up to 3500 kg
- Estimated speed = 7 to 10 cm/sec

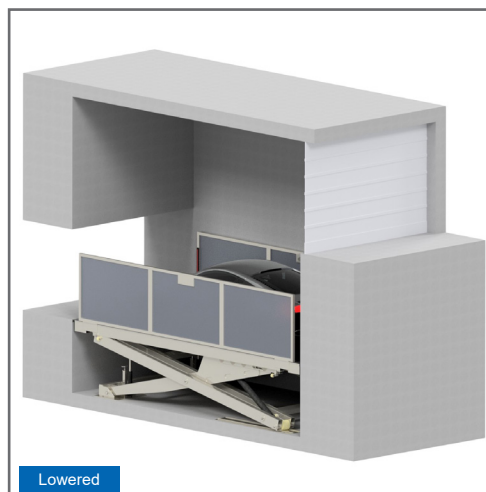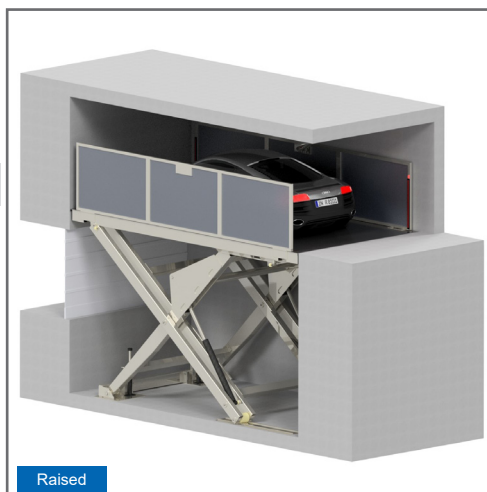

Model with driver on board

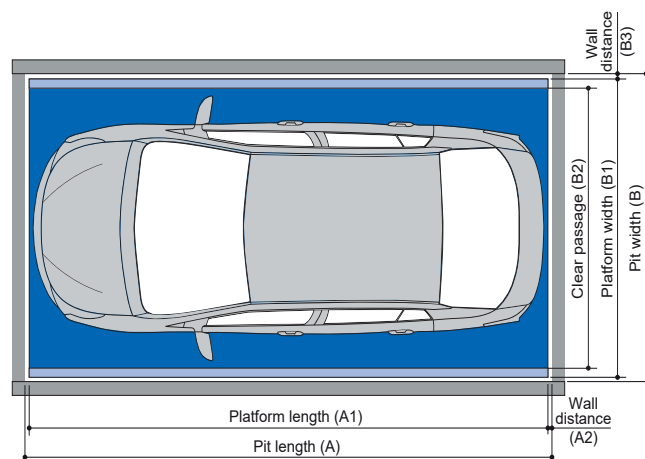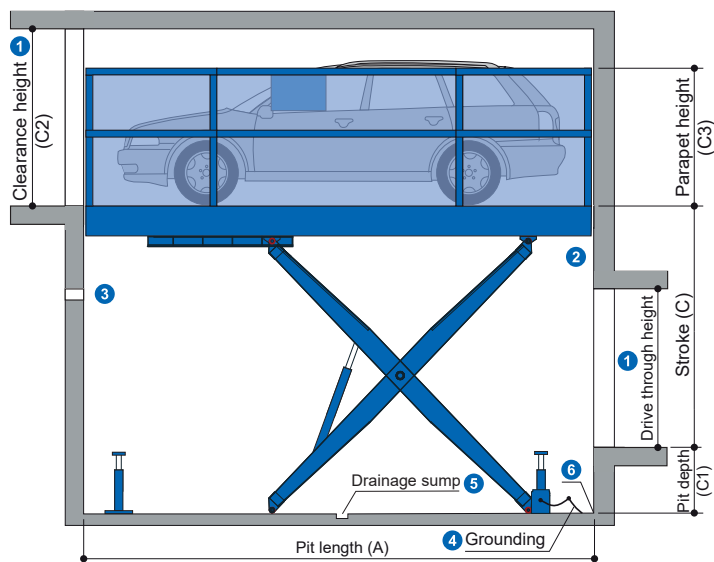

Parameter		Standard (mm)	Max (mm)
Pit length	A	5100	6000
Platform length	A1	5050	5950
Wall distance	A2	25	
Pit width	B	2500	3000
Platform width	B1	2400	2900
Clear passage	B2	2300	2800
Wall distance	B3	50	

Parameter		Standard (mm)	Max (mm)
Stroke	C	2700	3700
Pit depth	C1	550 to 650	
Clear passage	C2	to be defined	
Parapet height	C3	1200	2100

Notes

- 1 Must be at least as high as the greatest car height + 5 cm.
- 2 To comply with the minimum finished dimensions of the lift shaft, tolerances for space requirements ⁺³ according to VOB, Part C (DIN 18330 and 18331) and DIN 18202 must also be considered. Dimensions are in cm.
- 3 Ventilation inside the lift shaft has to be provided by the customer. If the exact dimensions are required, please consult **swiss-park**.
- 4 Grounding of the system to be connected to the central grounding on-site (to be provided by the customer).
- 5 Drainage pit : 50 x 50 x 50 cm, install a sump pump (refer to manufacturer's dimensions). Please contact **swiss-park** before determining the location of the drainage sump.
- 6 At the transition section between the pit floor and walls, no hollow mouldings/coves are possible. If hollow mouldings/coves are required, the systems must be designed smaller or the pits accordingly wider.

Page 1
Specification,
Variants and
Dimensions

Page 2
Lift position,
Lift with
garage door,
Approach

Page 3
Detail
building
construction,
Load plan

Page 4
Electrical
installation


Page 5
Technical
hints

Page 6
Facilities from
customer


Page 7
Description

► Lift position

System raised

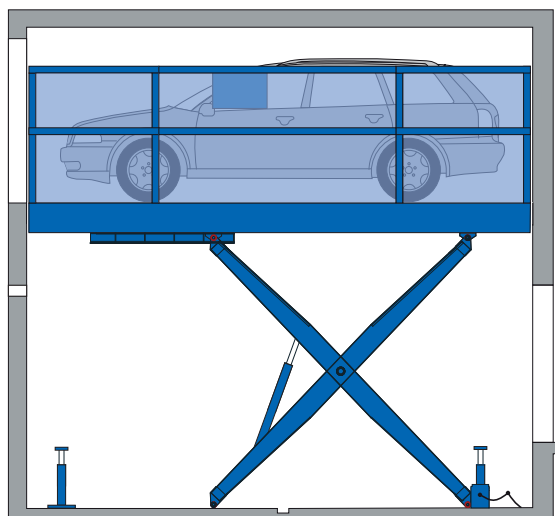

System lowered

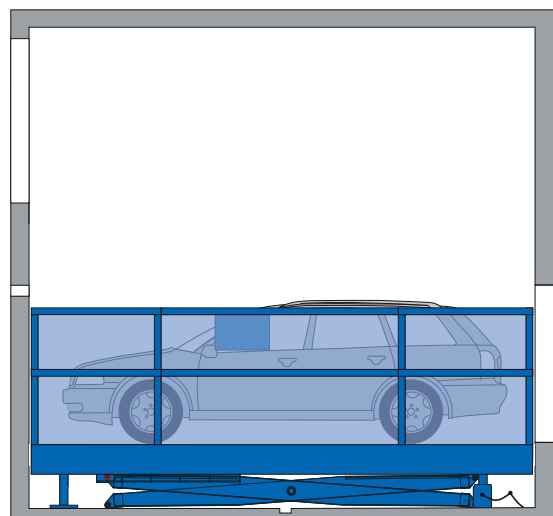

Page 1
Specification,
Variants and
Dimensions


Page 2
Lift position,
Lift with
garage door,
Approach

Page 3
Detail
building
construction,
Load plan


Page 4
Electrical
installation

► Lift with garage door

Sectional garage door

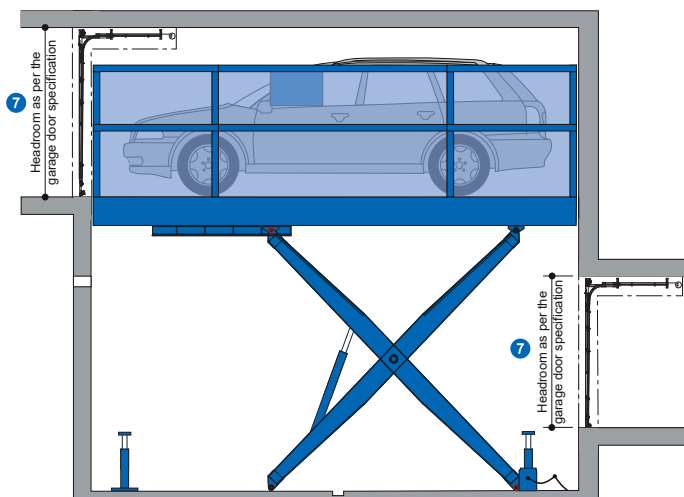

Roll-up garage door

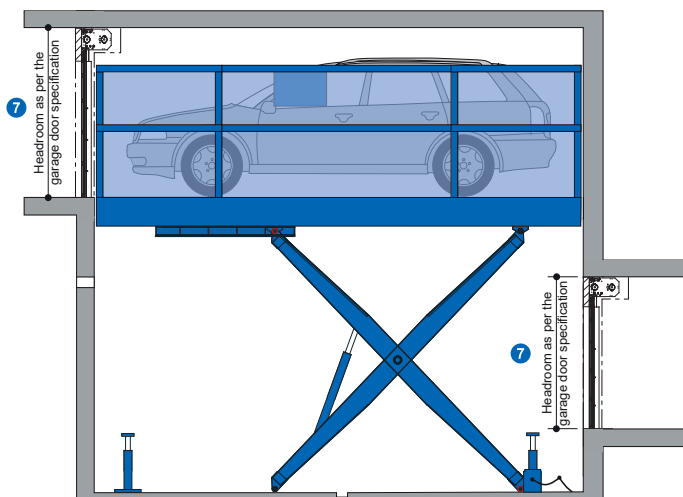



- 7 Dimensions for all doors must be coordinated with the door supplier.
Coordination between the door manufacturer and **swiss-park** is necessary.

Page 5
Technical
hints

Page 6
Facilities from
customer

Page 7
Description

► Approach

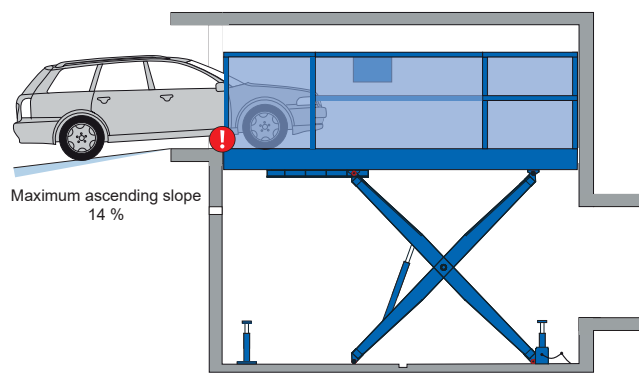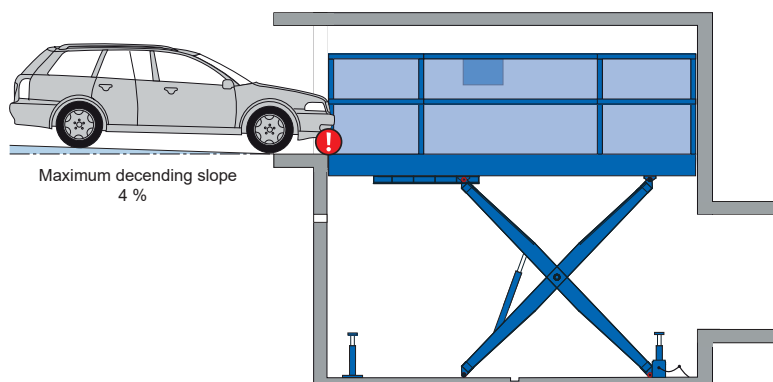


The illustrated maximum approach angles must not be exceeded.

Incorrect approach angles will cause serious maneuvering and positioning problems on the parking system for which the company **swiss-park** accepts no responsibility.

► Detail building construction – Hydraulic & Electric unit

The room where to place the hydraulic unit and the electric control panel will be positioned must be chosen carefully and must be easily accessible from the outside. It is recommended that this room be closed with its own door with a key.

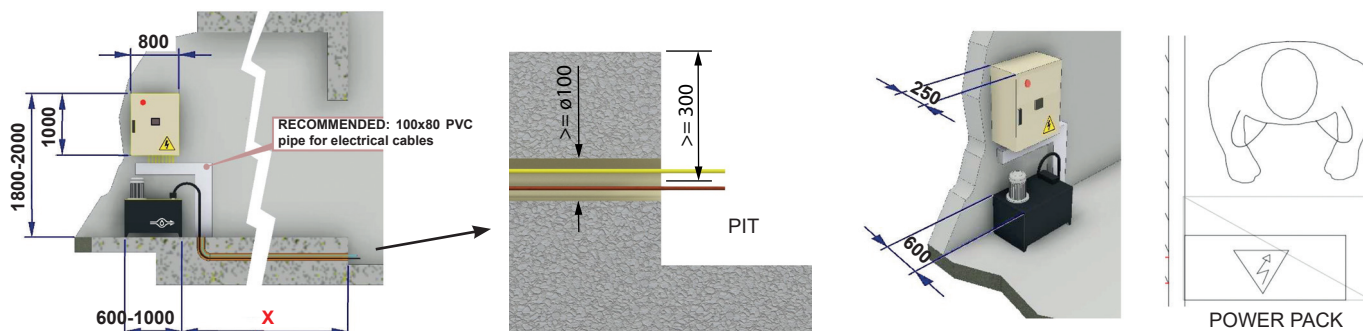


- The shaft pit and machine room must be painted with oil-resistant paint.
- The room chosen must have adequate ventilation to allow the electric motor to dissipate the heat produced during operation (< 50°C).
- Arrange plastic ducts as indicated for containing all the electrical cables coming from the pit compartment, push-button panels, doors etc.
- The pit must be connected to the electrical panel with 2 separate pipes with a minimum diameter of 100 mm to allow the passage of electric cables and hydraulic hoses. Avoid 90° bends in the pipes.
- When positioning the electrical panel and the hydraulic power unit, consider the measures indicated and provide sufficient space in front of it to ensure easy maintenance.


► Load plan

- The car lift are anchored into the side walls and ground. The drill hole depth on the floor is approx. 15 cm, and on the walls approx. 12 cm.
- Floor and walls below the drive-in level must be made of concrete (concrete quality min. C20/25)!
- The dimensions of the load-bearing points are approximate. If the exact dimensions are required, please consult **swiss-park**.

Section view

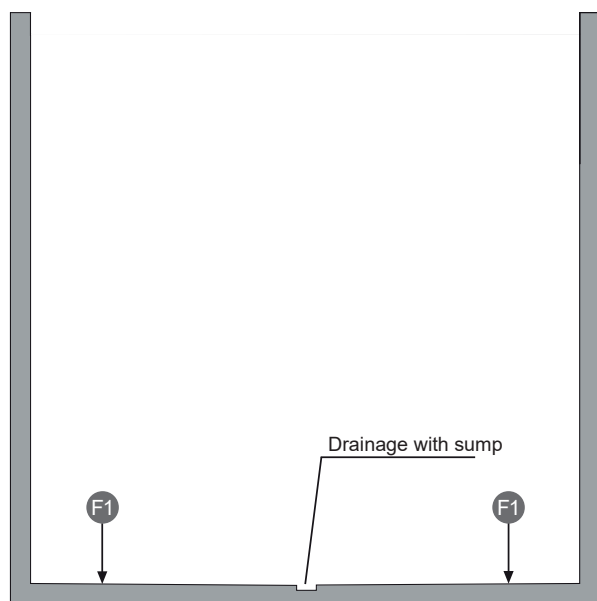

Top view

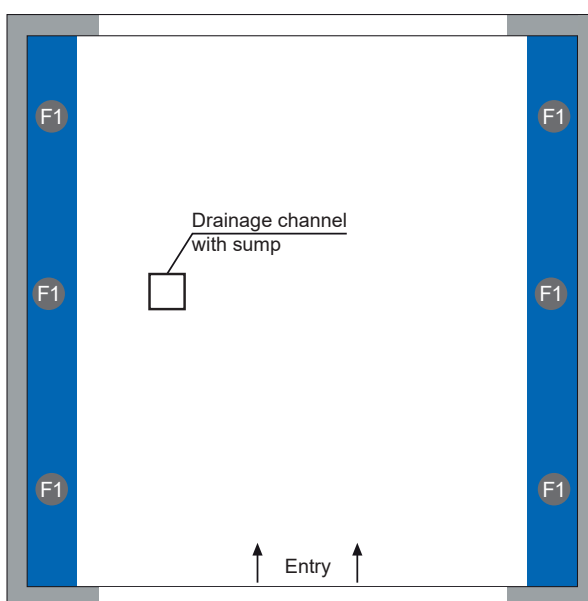

Force (kN)
F1
+35

Page 1
Specification,
Variants and
Dimensions

Page 2
Lift position,
Lift with
garage door,
Approach

Page 3
Detail
building
construction,
Load plan


Page 4
Electrical
installation

Page 5
Technical
hints

Page 6
Facilities from
customer

Page 7
Description

Electrical installation

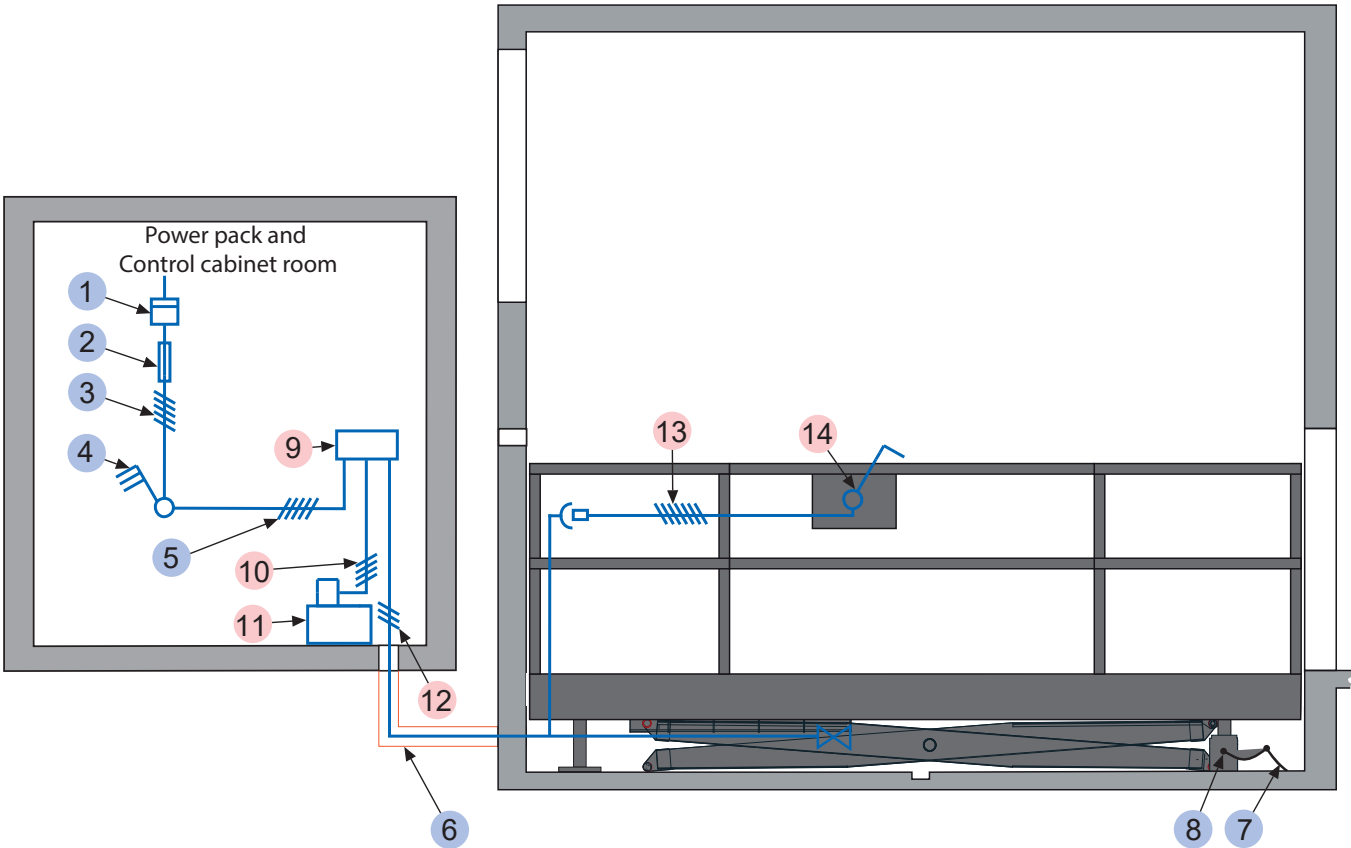

Electrical data
to be performed by the customer

No.	Qty.	Description	Postion
1	1	Electricity meter	in the supply line
2	1	Main fuse : 3 x fuse 32 A (slow) or circuit breaker 3 x 32 A (trigger characteristic K, G or C) (Current - 10.6 A, Starting current - 13.8 A)	in the supply line
3	1	Supply line 5 x 4 mm² (3 PH + N + PE) with marked wire and protective conductor	to main switch
4	1	Lockable main switch	defined at the plan check
5	1	Supply line 5 x 4 mm² (3 PH + N + PE) with marked wire and protective conductor	from main switch to unit
6	2	Min. ø100 pipes	from power pack and control cabinet to pit floor
7	every 10 m	Foundation earth connector	corner of pit floor
8	1	Potential equalization from foundation grounding connection system according to DIN EN 60204	

Electrical data
included in delivery of swiss-park

No.	Designation
9	Junction box unit
10	Supply line 5 x 4 mm² (3 PH + N + PE) with marked wire and protective conductor
11	Hydraulic unit - 5.5 kW, three phase current, 400 V, 50 Hz
12	Control line 5 x 2.5 mm² with marked wire and protective conductor
13	Control line 5 x 2.5 mm² with marked wire and protective conductor
14	Operating device

Page 1
Specification,
Variants and
Dimensions

Page 2
Lift position,
Lift with
garage door,
Approach

Page 3
Detail
building
construction,
Load plan

Page 4
Electrical
installation

Page 5
Technical
hints

Page 6
Facilities from
customer

Page 7
Description

► Technical hint

Usage area

The system is suitable for indoor installation and to lift cars with a driver on board. The car lift is suitable for residential as well as office buildings. Feel free to contact **swiss-park** for consultation.

Units

Low-noise hydraulic units are installed. We also recommend separating the garage body from the residential building. The hydraulic unit and the electrical components must be housed in a cabinet (see “**Detail building construction – Hydraulic & Electric unit**”, page 3).

CE certification

The systems offered correspond to the EC Machinery Directive 2006/42/CE.

Building application documents

According to the EC Machinery Directive 2006/42/CE, the **swiss-park** systems are subject to approval. Please observe the local rules and regulations.

Available documents

- Maintenance offer / contract
- Declaration of conformity

Environmental conditions

Ambient conditions for the areas around car lift systems:

- Temperature range -10 °C to +40 °C
- Relative humidity of 50% at a maximum outside temperature of +40 °C.

The lifting and lowering of the car lift are calculated at an ambient temperature of +10 °C and with the hydraulic system positioned immediately adjacent to the car lift. The operating time of car lift increases at lower ambient temperatures or with longer hydraulic lines.

Care & Protection

To avoid corrosion damage, please follow separate cleaning and care instructions (as per the “**Corrosion protection**” sheet) and ensure that your garage is well ventilated.

Noise protection

Standard noise protection:

As per DIN 4109-1 (Sound insulation in buildings – Part 1: Minimum requirements) - Section 9:

- Maximum noise level in living and sleeping areas 30 dB (A).

Noise created by users are not considered.

The following dimensions are required for adherence to this value:

- Noise protection package in accordance with quote/order (**swiss-park**).
- Noise insulation dimension of the building structure of minimum weighted sound reduction index, min. $R'w = 57$ dB (service to be provided by the customer)

Increased noise protection (special agreement):

As per DIN 4109-5 (Sound insulation in buildings - Part 5: Increased requirements) - Section 8:

- Maximum noise pressure level in living and sleeping areas 25 dB (A).

Noise created by users are not considered.

The following dimensions are required for adherence to this value:

- Noise protection package in accordance with quote/order (**swiss-park**).
- Noise insulation dimension of the building structure of min. $R'w = 62$ dB (service to be provided by the customer)

HINT : User noises are the noises that can be influenced by individual users of our **swiss-park** systems. These are created during the accessing of the platform, slamming of vehicle doors, engine, and brake noise.

Page 1
Specification,
Variants and
Dimensions

Page 2
Lift position,
Lift with
garage door,
Approach

Page 3
Detail
building
construction,
Load plan

Page 4
Electrical
installation

Page 5
Technical
hints

Page 6
Facilities from
customer

Page 7
Description

► Facilities to be provided by the customer

Safety barriers

During the car lift construction, in accordance with DIN EN ISO 13857, safety barriers are to be placed immediately in front of, adjacent to, or behind the systems where there are roadways.

Building services

Any lighting, ventilation, fire extinguishing and fire alarm systems, as well as clarification and compliance with the relevant regulatory requirements.

Ventilation

To ensure a continuous exchange of air, to reduce air humidity, prevent condensation and reduce vehicle moisture (from rain, snow, etc.), we recommend that the customer provide a ventilation system in conjunction with a specialist. This will help to minimise the risk of corrosion and resulting faults.

Lighting

The customer must observe local regulations pertaining to the illumination of parking spaces and roadways. In accordance with DIN EN 12464-1 'Light and lighting - Lighting of work places', an illumination level of min. 200 lx is recommended for the parking spaces and operating area of the system.

Drainage

A pump or drain sewerage is to be installed in the drainage sump (50 x 50 x 20 cm) inside the pit to avoid stagnant water (Component defect due to stagnant water will no longer be covered under warranty). For reasons of environmental protection, we recommend painting the pit floor, and to provide oil and petrol separators in the connections to the public sewage network.

Electrical supply to the main switch / Foundation earth connector


The customer must lay the supply cable to the master switch during assembly. Functional capability can be checked by our engineers on-site, in conjunction with the electrical engineer. If this is not possible during assembly for reasons attributable to the customer, the customer must commission an electrical engineer.

The customer must earth the steel structure with a foundation earth connection (earthing distance max. 10 m) and equipotential bonding in accordance with DIN EN 60204 (see "Electrical installation", page 4)

Control panel

Empty conduits and recesses for the operating element (see "Electrical installation", page 4). Consultation with **swiss-park** is required when using folding doors.

Control panel on plaster

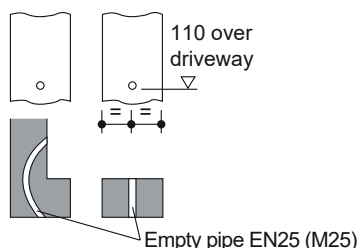

Accessibility

If installation by **swiss-park**, Free accessibility of the pit with a crane or truck for lowering the lift. For completion, the lift must be accessible by car.

Other services on-site

- Preparation of the lift shaft
- Measures for the implementation of water protection regulations
- Measures to comply with fire protection regulations and noise protection in accordance with DIN4109
- Telephone line (PSTN) with connection to the control cabinet for emergency call activation
- Gates to the shaft end. Attention: 230 Volt (single phase) and potential free contact required
- Pit measurement
- Daily update on project photos, if required.
- Foundation grounding if necessary
- All permits and approvals

If the following are not included in the quotation, they will also have to be provided/paid by the customer:

- Mounting of contactor and terminal box to the wall valve, complete wiring of all elements in accordance with the circuit diagram
- Costs for final technical approval by an authorized body
- Main switch
- Control line from main switch to hydraulic unit
- Railing

Page 1
Specification,
Variants and
Dimensions

Page 2
Lift position,
Lift with
garage door,
Approach

Page 3
Detail
building
construction,
Load plan

Page 4
Electrical
installation

Page 5
Technical
hints

Page 6
Facilities from
customer

Page 7
Description

► Description - Car lift with driver on board

General description

- **swiss-park** car lifts are for lifting cars with a driver on board.
- Dimensions according to the underlying pit, width and height dimensions.
- Passenger car positioning on car lift by means of positioning sensors on both sides (to be set in accordance with the operating instructions).
- Operation via a control element with Dead man's switch.
- Fixing the control element usually in front of the entrance or on the way revealing the outside.
- Operating instructions at every operating point.
- For car lifts with an entrance door, special dimensions must be respected.

swiss-park system consisting of:

- 1 Rigid base with foundation (fixed to the floor)
- 2 Hydraulic cylinders
- 1 Platform
- 4 Scissor members
- 6 Support beams for scissor members
- 4 / 8 Nylon guide rollers
- Dowels, screws, fasteners, connecting elements etc.

Platform consisting of:

- Checker plates
- Side fence
- Crossbeams
- Lateral beams
- Brackets
- Screws, nuts, etc.

Hydraulics consisting of:

- Hydraulic cylinders
- Solenoid valve
- Safety valves
- Hydraulic lines
- Hydraulic fittings
- High-pressure hoses
- Mounting material

Electrical system consisting of:

- 2 Operating elements (Emergency-stop, lock, access via RFID)
- Upto 4 safety light curtains for edge control
- Junction box unit
- Control cabinet

Hydraulic unit consisting of:

- Hydraulic oil tank
- Oil filling
- Internal gear pump
- Pump holder
- Coupling
- Three-phase motor (5.5 kW, 400 V, 50 Hz, low noise)
- Pressure gauge
- Pressure relief valve
- Hydraulic hoses (to reduce noise transmission to the hydraulic pipes)

We reserve the right to change these specifications without notice!

swiss-park reserves the right, in the course of technical and technological progress, to use newer or different technologies, systems, processes, procedures, or standards than those originally offered and ensure that the customer does not incur any disadvantage.

Page 1
Specification,
Variants and
Dimensions

Page 2
Lift position,
Lift with
garage door,
Approach

Page 3
Detail
building
construction,
Load plan

Page 4
Electrical
installation

Page 5
Technical
hints

Page 6
Facilities from
customer

Page 7
Description



Swiss-Park GmbH

Falkenweg 8, D-88213 Ravensburg

Tel: +49 (0)751-999 23 740

E-mail : info@swiss-park.com

Website : www.swiss-park.com