

STACK PARKER - S2.8 OUTDOOR

Maximum robust



Technical data sheet

- ✓ CE certified
- ✓ Space saving
- ✓ Independent parking
- ✓ Low maintenance cost
- ✓ Robust
- ✓ Low noise


S2.8 - OUTDOOR

Stack Parker


Dimensions

- All dimensions specified are the minimum, finished dimensions.
- Tolerances for the dimensions $^{+3}_{0}$ ①
- Dimensions are in cm.

Standard passenger car (L)

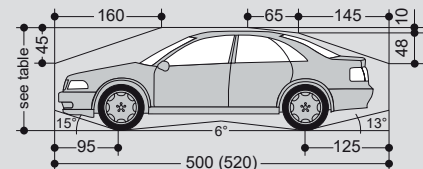

Standard station wagon (K)

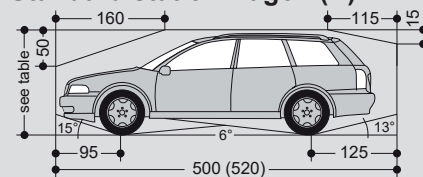

Parking possibilities

Standard passenger cars: Saloon, estate, SUV, Van according to clearance gauge and maximum parking space load.

For countries where snow loads do not have to be taken into account:

	Standard S2.8-O	Reinforced S2.8-R-O
Width in cm	190 ②	190 ②
Weight in kg	2000	2600
Wheel load in kg	500	650


For countries where snow loads have to be taken into account, the parking space on the upper parking space is reduced according to the following table:

	Standard S2.8-O	Reinforced S2.8-R-O
Width in cm	190 ②	190 ②
Weight in kg	1500	2000
Wheel load in kg	375	500


The snow loads apply to a snow height of 20 cm. For greater snow heights, the snow load must be cleared accordingly.

Height dimensions

All height variants can be found on page 2.




Smallest version



Largest version



Raised

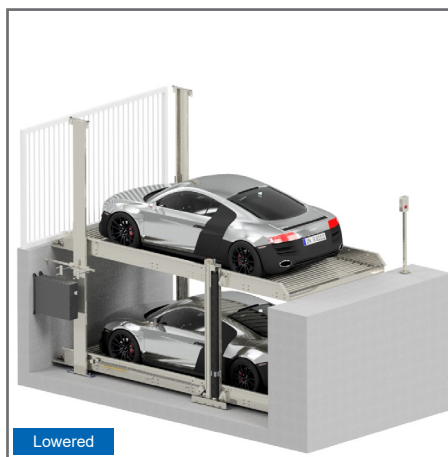


Lowered

Specification

- EB (single platform) = 2 vehicles
- DB (double platform) = 4 vehicles
- Independent parking
- Horizontal access to both levels
- Car heights = 150 cm to 210 cm
- Car length = 500 cm to 520 cm
- **S2.8-O (Standard)** : Load capacity = 2000 kg per parking place, Usable platform width up to 270 cm for EB and up to 530 cm for DB
- **S2.8-R-O (Reinforced)** : Load capacity = 2600 kg per parking place. Usable platform width up to 270 cm for EB and up to 540 cm for DB

Overview - Stack parker

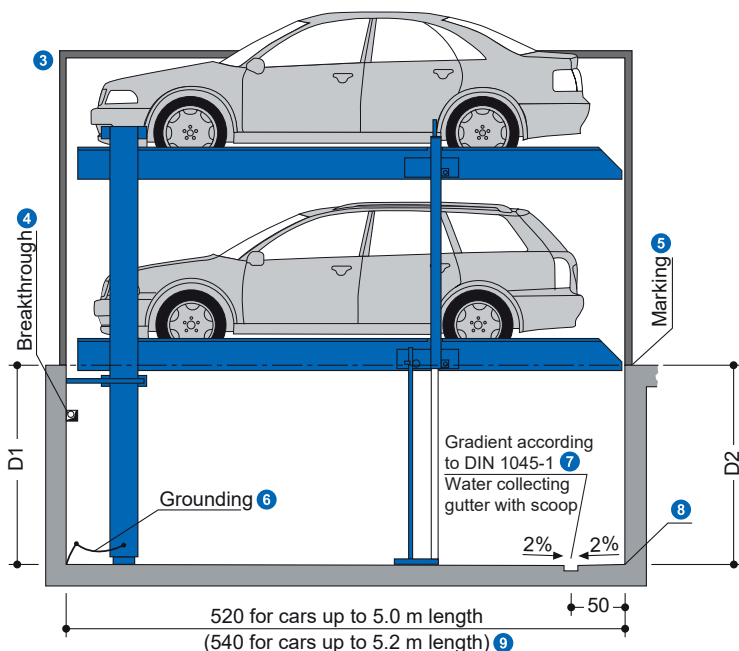


Notes

- ① To comply with the minimum finished dimensions, the tolerances according to VOB, Part C (DIN 18330 and 18331) and DIN 18202 must also be considered.
- ② Car width for 230 cm platform width. For the greatest possible ease-of-use, we recommend
 - a) S2.8-O - platform widths of 250 to 270 cm (EB) or 500 cm (DB).
 - b) S2.8-R-O - platform widths of 260 to 270 cm (EB) or of 510 to 540 cm (DB).
- ③ Three-sided barriers in accordance with DIN EN ISO 13857.
- ④ For dividing walls: cutting through 10 x 10 cm.
- ⑤ In compliance with DIN EN 14010, 10 cm wide yellow-black markings compliant to ISO 3864 must be applied by the customer to the edge of the pit in the entry area to mark the danger zone (see "Load plan", page 4).
- ⑥ Grounding of the system to be connected to the central grounding on-site (to be provided by the customer).
- ⑦ Slope with drainage channel and sump.
- ⑧ At the transition section between the pit floor and walls, no hollow mouldings/coves are possible. If hollow mouldings/coves are required, the systems must be designed smaller or the pits accordingly wider.
- ⑨ For cars up to a length of 5.20 m, we recommend a pit length of 5.40 m (with tow bar 5.50 m).


► Overview of stack parker variants

S2.8-O-165




Car height
below
150

S2.8-O-170




Car height
below
155

S2.8-O-175




Car height
below
160

S2.8-O-180 ⑩




Car height
below
165

S2.8-O-185




Car height
below
170

S2.8-O-190




Car height
below
175

S2.8-O-195 ⑩




Car height
below
180

S2.8-O-205




Car height
below
190

S2.8-O-215




Car height
below
200

S2.8-O-220 ⑩



Car height
below
205

S2.8-O-230



Car height
below
215

⑩ Standard type

Page 1
Sections,
dimensions,
car data

Page 2
Variants
and Height
dimensions

Page 3
Width
dimensions,
Parking
position,
Approach

Page 4
Wall
clearance,
Load plan,
Installation
data

Page 5
Electrical
installation

Page 6
Technical hint


Page 7
Facilities from
customer

Page 8
Description
EB + DB

► Width dimensions


Dividing walls

Single platform (EB)



Usable platform width	Garage width B1
230	260
240	270
250	280
260	290
270	300


Double platform (DB)



Usable platform width	Garage width B1
460	490
470	500
480	510
490	520
500	530
510*	540
520*	550
530*	560
540*	570

*only S2.8-R-O

Single and double platform (EB + DB) – Example




Usable platform width	Garage width B1
230 + 460	750
240 + 470	770
250 + 480	790
250 + 500	810
270 + 500	830
270 + 510*	840
270 + 520*	850
270 + 530*	860
270 + 540*	870

Carriageway according to local regulations


HINT : End parking spaces are generally more difficult to drive into. Therefore, we recommend for end parking spaces our wider platforms. Parking on standard width platforms with larger vehicles is difficult. This depends on the type of vehicle, approach and above all on the individual driver's skill. For maximum comfort, we generally recommend our maximum platform widths of 270 cm for a single platform (EB) and 540 cm for a double platform (DB).

► Parking position



System raised

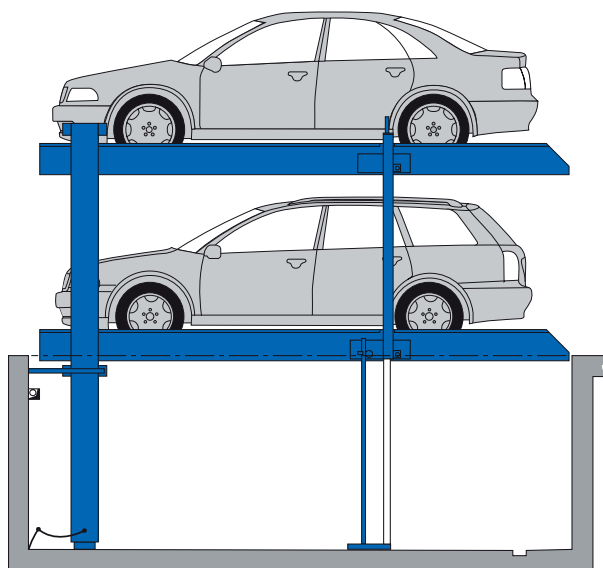

System lowered

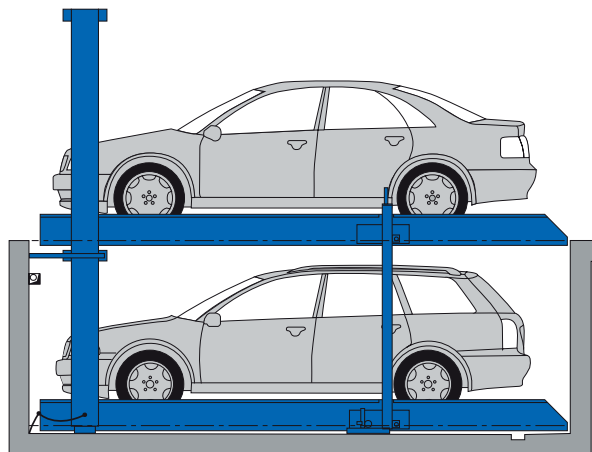


► Approach

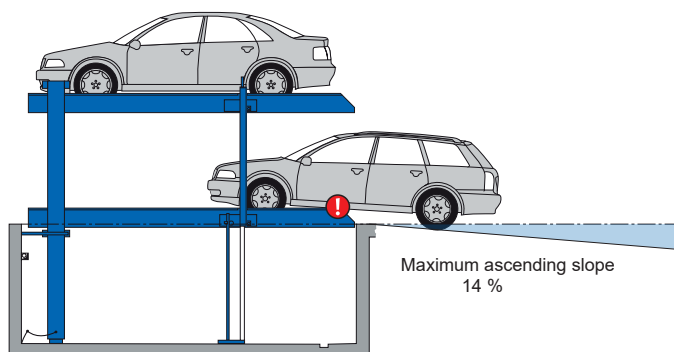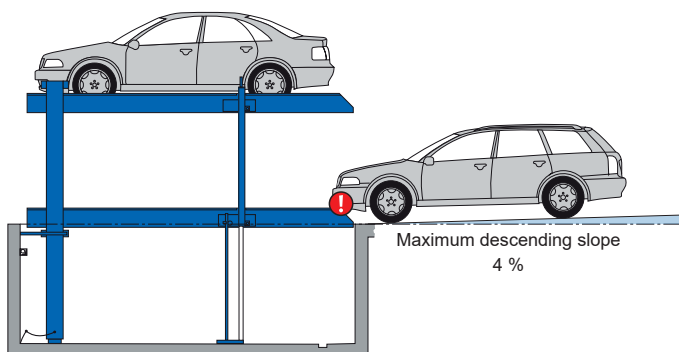

The illustrated maximum approach angles must not be exceeded.

Incorrect approach angles will cause serious maneuvering and positioning problems on the parking system for which the company **swiss-park** accepts no responsibility.

► Wall clearance

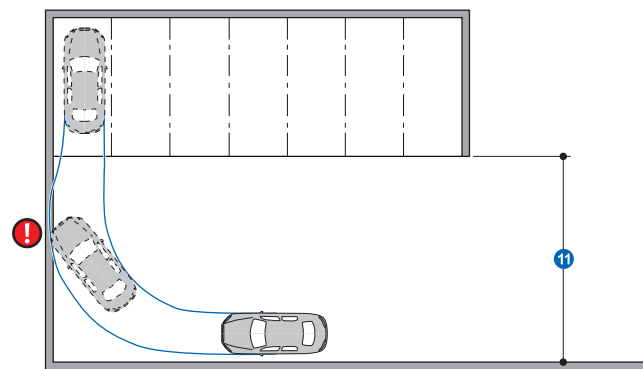

We recommend platform widths of a minimum of 250 cm and driving lane widths of 650 cm so that vehicles can comfortably enter and leave the **swiss-park**-systems without difficulty


Narrower platforms may impede parking according to the following criteria.

- Driving lane width
- Entrance conditions
- Vehicle dimensions

11 Observe minimum driving lane width in accordance with local regulations!

► Load plan

- The stack parker systems are anchored into the ground. The drill hole depth on the floor is approx. 15 cm, and on the walls approx. 12 cm.
- Floor and walls below the drive-in level must be made of concrete (concrete quality min. C20/25)!
- The dimensions of the load-bearing points are approximate. If the exact dimensions are required, please consult **swiss-park**.

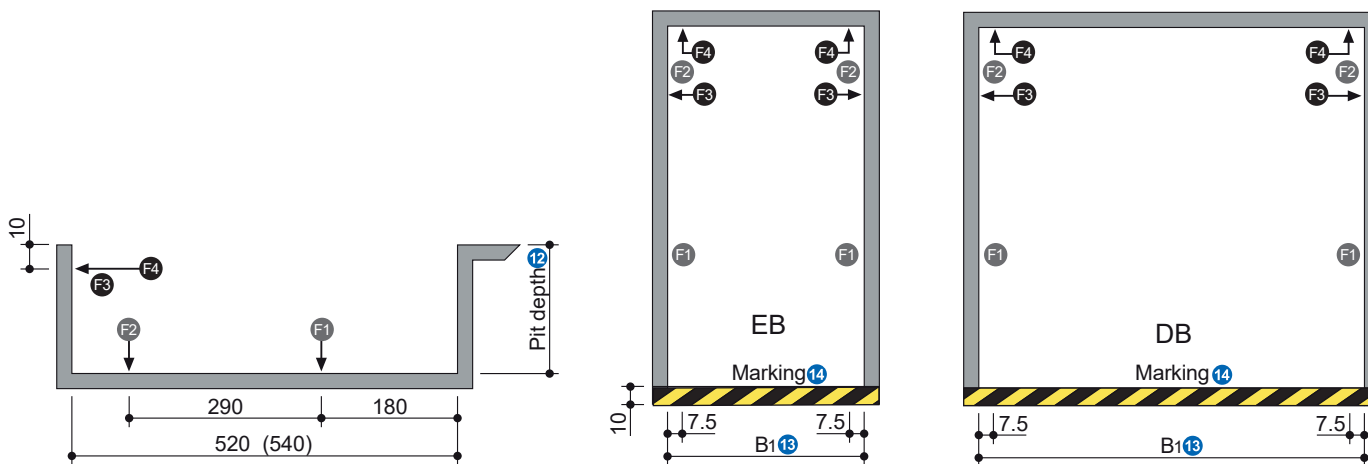

Platform load	Force (kN)					
	F1	F2	F3	F4	F5	F6
EB 2000 kg	+28 -1,5	+12	±1	±0,8	±1,1	±1
EB 2600 kg	+36 -1,9	+15	±1,3	±1	±1,4	±1,4
EB 3000 kg	+42 -2,1	+17	±1,5	±1,2	±1,6	±1,6
DB 2000 kg	+51 -5,8	+20	±1,6	±2,6	±2	±2
DB 2600 kg	+67 -7,4	+26	±2,1	±3,4	±2,6	±2,6


Type	H1
S2.8-165	210
S2.8-170	215
S2.8-175	220
S2.8-180	225
S2.8-185	230
S2.8-190	235
S2.8-195	240
S2.8-205	250
S2.8-215	260
S2.8-220	265
S2.8-230	275

12 Height dimensions (see “Overview of stack parker variants”, Page 2)

13 Width dimension B1 (see “Width dimensions”, Page 3)

14 Marking in accordance with DIN EN 14010 (illustration colours are not consistent with DIN ISO 3864)

► Detail building construction – foundation hydraulic unit



If the installation of the hydraulic power pack is not possible in adjacent room or building, the hydraulic power pack and the electrical components must be accommodated in a cabinet (at an additional cost).

The cabinet is to be planned in the rear area of the stack parker. For this purpose, a foundation (140 x 60 cm) made of concrete is required (concrete quality min. C20/C25). The cabinet is doweled into the floor. The drill hole depth is approx. 10 cm.

15 Free space

Page 1
Sections,
dimensions,
car data

Page 2
Variants
and Height
dimensions

Page 3
Width
dimensions,
Parking
position,
Approach

Page 4
Wall
clearance,
Load plan,
Installation
data


Page 5
Electrical
installation

Page 6
Technical hint

Page 7
Facilities from
customer

Page 8
Description
EB + DB

Electrical installation

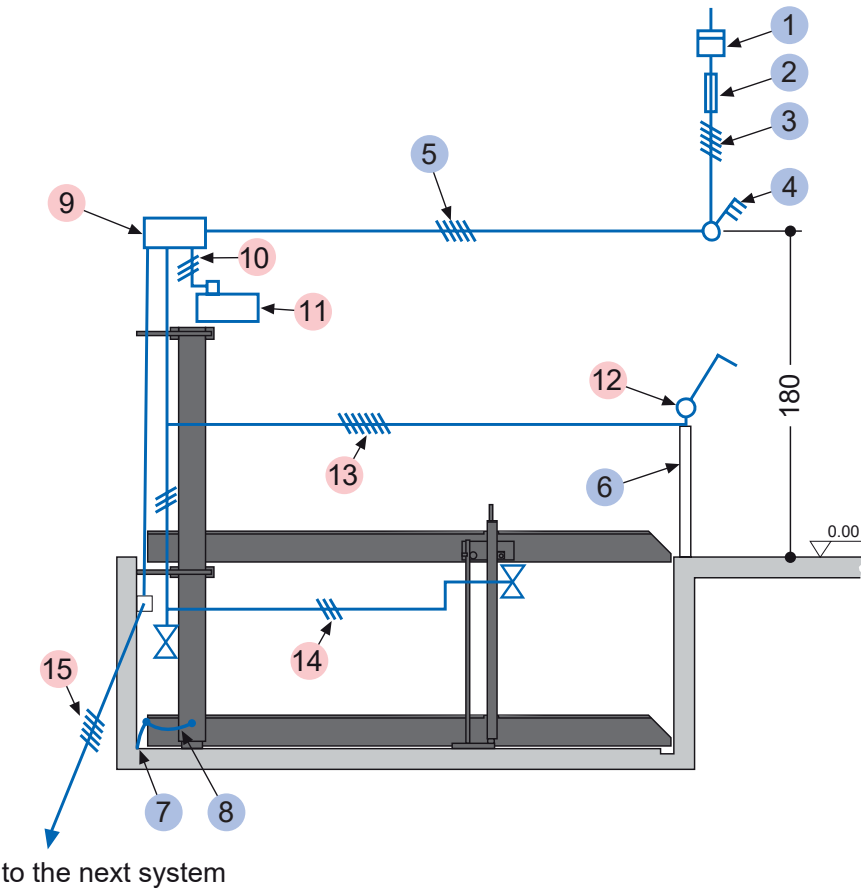

Electrical data
to be performed by the customer

No.	Qty.	Description	Position	Frequency
1	1	Electricity meter	in the supply line	
2	1	Main fuse: 3 x fuse 16 A (slow) or circuit breaker 3 x 16 A (trigger characteristic K, G or C) 3 x fuse 20 A (slow) or circuit breaker 3 x 20 A (trigger characteristic K, G or C)	in the supply line in the supply line	1 per 3,0 kW unit 1 per 5,2 kW unit
3	1	Supply line 5 x 2,5 mm² (3 PH + N + PE) with marked wire and protective conductor	to main switch	1 per unit
4	1	Lockable main switch	defined at the plan check	1 per unit
5	1	Supply line 5 x 2,5 mm² (3 PH + N + PE) with marked wire and protective conductor	from main switch to unit	1 per unit
6	1	Control station		1 per unit
7	every 10 m	Foundation earth connector	corner pit floor	
8	1	Potential equalization from foundation grounding connection system according to DIN EN 60204		1 per system

Electrical data
included in delivery of swiss-park

No.	Designation
9	Junction box unit
10	Control line 4 x 2,5 mm² with marked wire and protective conductor
11	Hydraulic unit - 3.0 kW / 5.2 kW, three phase current, 230/400 V, 50 Hz 16
12	Operating device
13	Control line 4 x 2,5 mm² with marked wire and protective conductor
14	Control line 4 x 2,5 mm² with marked wire and protective conductor
15	Connection cable to the next system

16 Unit 5,2 kW only for S2.8-R-O

Page 1
Sections,
dimensions,
car data

Page 2
Variants
and Height
dimensions

Page 3
Width
dimensions,
Parking
position,
Approach

Page 4
Wall
clearance,
Load plan,
Installation
data

Page 5
Electrical
installation

Page 6
Technical hint

Page 7
Facilities from
customer

Page 8
Description
EB + DB

► Technical hint

Usage area

As a standard, the system is suitable for long-time car parking. Frequent usage of upper parking space (e.g., short-term parking in office buildings or hotels) requires structural modifications to the **swiss-park** system. Feel free to contact us for consultation.

Units

Low-noise hydraulic units mounted on Anti-vibration mounting plates are installed. But, we also recommend separating the garage body from the residential building. If it is not possible to install the hydraulic unit in adjacent buildings or rooms, the hydraulic unit and the electrical components must be housed in a cabinet (at an additional cost) (see “**Detail building construction – foundation hydraulic unit**”, page 4).

Railings

If the permissible drop opening is exceeded, railings are to be mounted on the systems. If there are traffic routes next to or behind the installations, railings compliant to DIN EN ISO 13857 must be installed by the customer. Railings must also be in place during construction.

Protective plates

Spacing between the stack parker and the pit walls should not exceed 10 cm. Extra space to be covered with protective plates.

CE certification

The systems offered correspond to DIN EN 14010 and the EC Machinery Directive 2006/42/EG.

Building application documents

According to LBO and GaVo (garage regulations), the **swiss-park** systems are subject to approval. Please observe the local rules and regulations.

Available documents

- Wall recess plans
- Maintenance offer/contract
- Declaration of conformity

Environmental conditions

Ambient conditions for the areas around stack parker systems:

- Temperature range -10 °C to +40 °C
- Relative humidity of 50% at a maximum outside temperature of +40 °C.

The lifting and lowering of stack parker systems are calculated at an ambient temperature of +10 °C and with the hydraulic system positioned immediately adjacent to the stack parker. The operating time of stack parker increases at lower ambient temperatures or with longer hydraulic lines.

Care & Protection

To avoid corrosion damage, please follow separate cleaning and care instructions (as per the “**Corrosion protection**” sheet) and ensure that your garage is well ventilated.

Noise protection

Standard noise protection:

As per DIN 4109-1 (Sound insulation in buildings – Part 1: Minimum requirements) - Section 9:

- Maximum noise level in living and sleeping areas 30 dB (A).

Noise created by users are not considered.

The following dimensions are required for adherence to this value:

- Noise protection package in accordance with quote/order (**swiss-park**).
- Noise insulation dimension of the building structure of minimum weighted sound reduction index, min. $R'w = 57$ dB (service to be provided by the customer)

Increased noise protection (special agreement):

As per DIN 4109-5 (Sound insulation in buildings - Part 5: Increased requirements) - Section 8:

- Maximum noise pressure level in living and sleeping areas 25 dB (A).

Noise created by users are not considered.

The following dimensions are required for adherence to this value:

- Noise protection package in accordance with quote/order (**swiss-park**).
- Noise insulation dimension of the building structure of min. $R'w = 62$ dB (service to be provided by the customer)

HINT : User noises are the noises that can be influenced by individual users of our **swiss-park** systems. These are created during the accessing of the platform, slamming of vehicle doors, engine, and brake noise.

Page 1
Sections,
dimensions,
car data

Page 2
Variants
and Height
dimensions

Page 3
Width
dimensions,
Parking
position,
Approach

Page 4
Wall
clearance,
Load plan,
Installation
data

Page 5
Electrical
installation

Page 6
Technical hint

Page 7
Facilities from
customer

Page 8
Description
EB + DB

► Facilities to be provided by the customer

Safety barriers

During the stack parker construction, in accordance with DIN EN ISO 13857, safety barriers are to be placed immediately in front of, adjacent to, or behind the systems where there are roadways.

Parking space numbering

Parking space numbering, if required.

Building services

Ventilation, fire extinguishing and fire alarm systems, as well as clarification and compliance with the relevant regulatory requirements.

Lighting

The customer must observe local regulations pertaining to the illumination of parking spaces and roadways. In accordance with DIN EN 12464-1 'Light and lighting - Lighting of work places', an illumination level of min. 200 lx is recommended for the parking spaces and operating area of the system.

Drainage

For the front area of the pit, we recommend a drainage channel, which you connect to a floor drain system or sump (50 x 50 x 20 cm). The drainage channel may be inclined to the side, however not the pit floor itself (longitudinal incline is available). For reasons of environmental protection, we recommend painting the pit floor, and to provide oil and petrol separators in the connections to the public sewage network. To drain large quantities of water from the yard area, the customer must install a water collection channel around the perimeter of the pit.

Warning labels

In accordance with DIN EN 14010, the customer must provide 10 cm wide, yellow/black marking in accordance with DIN ISO 3864 in the access area in front of the contact area of the upper platform edge to identify the hazard area (see "**Load plan**", Page 4)

Wall cutout

Any necessary wall cutout according to page 1.

Electrical supply to the main switch / Foundation earth connector


The customer must lay the supply cable to the master switch during assembly. Functional capability can be checked by our engineers on site, in conjunction with the electrical engineer. If this is not possible during assembly for reasons attributable to the customer, the customer must commission an electrical engineer.

The customer must earth the steel structure with a foundation earth connection (earthing distance max. 10 m) and equipotential bonding in accordance with DIN EN 60204 (see "**Electrical installation**", page 5)

Control panel

Empty conduits and recesses for the operating element (see "**Electrical installation**", page 5). Consultation with **swiss-park** is required when using folding doors.

Control panel on plaster

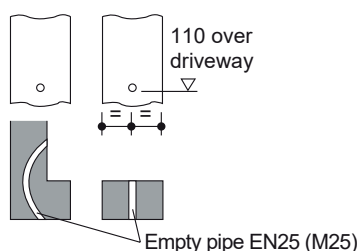

Other services on-site

- Preparation of the stack parker pit
- Measures for the implementation of water protection regulations
- Measures to comply with fire protection regulations and noise protection in accordance with DIN4109
- Pit measurement
- Daily update on project photos, if required.
- Foundation grounding if necessary
- All permits and approvals

If the following are not included in the quotation, they will also have to be provided/paid for by the customer:

- Mounting of contactor and terminal box to the wall valve, complete wiring of all elements in accordance with the circuit diagram
- Costs for final technical approval by an authorized body
- Main switch
- Control line from main switch to hydraulic unit
- Railing
- Floor marking

Page 1
Sections,
dimensions,
car data

Page 2
Variants
and Height
dimensions

Page 3
Width
dimensions,
Parking
position,
Approach

Page 4
Wall
clearance,
Load plan,
Installation
data

Page 5
Electrical
installation

Page 6
Technical hint

Page 7
Facilities from
customer

Page 8
Description
EB + DB

► Description - Single platform (EB) and Double platform (DB)

General description

- **swiss-park** systems are for independent parking of 2 cars (EB), 2x2 cars (DB) on top of each other.
- Dimensions according to the underlying pit, width and height dimensions
- The pitches are driven horizontally and have a gradient of $\pm 1^\circ$ for proper drainage of the platforms.
- By special arrangement of the lifting and supporting structure, the opening of the doors is not restricted.
- Passenger car positioning on each parking space by means of a positioning aid mounted on the right-hand side (to be set in accordance with the operating instructions).
- Operation via a control element with automatic reset by means of a key that closes the same way.
- Fixing the control element usually in front of the support or on the way revealing the outside.
- Operating instructions at every operating point.

swiss-park system consisting of:

- 2 Pillars with foundation rails (fixed to the floor)
- 2 Sliding pieces (with sliding guides attached to the pillars)
- 2 Platforms
- 1 mechanical synchronization system (for the synchronous operation of the hydraulic cylinders during lifting and lowering)
- 2 Hydraulic cylinders
- 2 rigid supports (connection of the platforms)
- 1 automatic hydraulic breakage protection (prevents involuntary lowering when driving on)
- Dowels, screws, fasteners, connecting elements etc.

Platform consisting of:

- Platform profiles
- Adjustable positioning aids
- Bevelled bumpers
- Lateral beams
- Bearing center [DB only]
- Brackets
- Screws, nuts, spacer tubes, etc.

Hydraulics consisting of:

- Hydraulic cylinder
- Solenoid valve
- Safety valves
- Hydraulic lines
- Hydraulic fittings
- High-pressure hoses
- Mounting material

Electrical system consisting of:

- Operating element (Emergency-stop, lock, 1 master key per parking space)
- Junction box unit
- Control cabinet

Hydraulic unit consisting of:

- Hydraulic unit (low noise, installed onto a console with a rubber-bonded-to-metal mounting)
- Hydraulic oil tank
- Oil filling
- Internal gear pump
- Pump holder
- Coupling
- Three-phase motor (3.0 kW / 5.2 kW, 230/400 V, 50 Hz)
- Pressure gauge
- Pressure relief valve
- Hydraulic hoses (to reduce noise transmission to the hydraulic pipes)

We reserve the right to change these specifications without notice!

swiss-park reserves the right, in the course of technical and technological progress, to use newer or different technologies, systems, processes, procedures, or standards than those originally offered and ensure that the customer does not incur any disadvantage.

Page 1
Sections,
dimensions,
car data

Page 2
Variants
and Height
dimensions

Page 3
Width
dimensions,
Parking
position,
Approach

Page 4
Wall
clearance,
Load plan,
Installation
data

Page 5
Electrical
installation

Page 6
Technical hint

Page 7
Facilities from
customer

Page 8
Description
EB + DB



Swiss-Park GmbH

Falkenweg 8, D-88213 Ravensburg

Tel: +49 (0)751-999 23 740

E-mail : info@swiss-park.com

Website : www.swiss-park.com